



DRAGON®

DP49 4X4 Pump



SPECIFICATIONS:

1) 4NNT Cornell Pump Package with 49HP Kubota Engine; Vac Assisted Pump

4NNT Cornell Redi-Prime Pump

- All Iron Construction
- Horizontal Engine Mount
- SAE 4 Bell Housing
- 10" Drive Coupling
- Tungsten to Silicon Carbide Mechanical Seal.
- Run-Dry reservoir
- Redi-Prime Priming System
- Oil lubricated Bearings
- Enclosed Stainless Impeller w/ 3" solids handling capability

49HP Tier 3 Kubota Power Unit

- In-Line 4 Cycle Turbo Charged
- Liquid Cooled
- 12 Volt
- Interim 49HP (36KW) / Constant 41HP (30.8KW)
- LOFA Standard Instrumentation W/ 15amp float switch
- Two year / 2000 Hour Warranty

Fuel Cell Skid w/ Lifting Bell

- 6k Single Axle 16" 10ply trailer tires
- 96gal fuel cell
- Over the road light package
- Customer specified fittings
- Work Light and pressure gauges
- Dual 8K Leveling Jacks



600HPPUMP • 2/16

frac.sales@modernusa.com • www.dragonproductsltd.com • 866-914-8198

U.S. owned and operated for over 50 years. © Copyright 2014 Modern Group Inc. All rights reserved.


DP49 4x4 Pump

Feet x .305 = Meters
Inches x 25.4 = Millimeters
GPM x .227 = Cubic Meters/Hour
GPM x 3.785 = Liters/Minute
HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _s	Suction	Discharge	No. vanes
VARIOUS	10.09"	ENCLOSED	3"	1900	4"	4"	2

SINGLE VOLUTE

MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

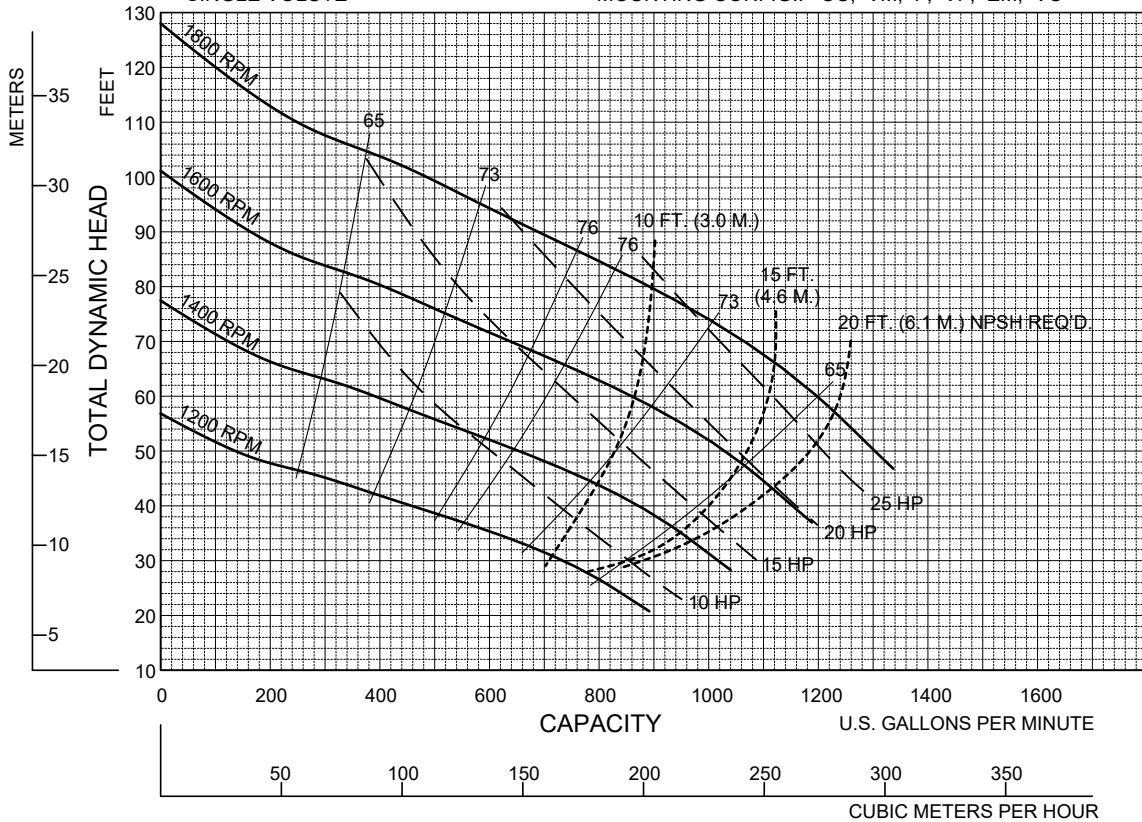

Performances shown are for cool water, close-coupled electric configuration with Cyclo Seal. Other mounting configurations, seal arrangements or liquids may require horsepower and/or performance adjustments.

