

RANCO ANVIL Aluminum End Dump Trailer









Dragon's RANCO ANVIL trailers are no stranger to a hard day's work, so it's only natural that they are a part of Dragon. With more than 30 years expertise in manufacturing tank trailers customers trust the Dragon name. In-house engineering, vast production capacity, and knowledgeable support teams deliver the severe-duty equipment and service you need every time, every where.















ALUMENDDUMP • 1/1

RANCO ANVIL Aluminum End Dump Trailer

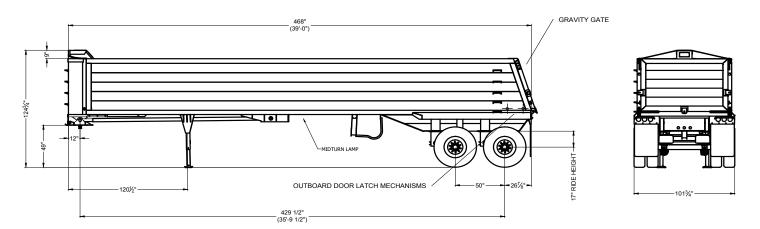

SPECIFICATIONS:

- Aluminum Extruded/Double High Wall End Dump
- Capacity: Not to exceed DOT Bridge Laws, Distributed
- Length: 468" (39 ft) overall length, at lower rail
- Box: 5454 H32 Aluminum, 1/4" Thick floor, 3/16" Thick wall face, hollow core, 96 wide on 102 wide axles
- Floor Structure: 4" High aluminum channel, 12" on center
- Hoist: 8" DIA, 5 stage, single acting, 265" stroke
- Rear Gate: Gravity, with (2) air cylinder gate latches, valved to the draft arm movement, rubber sealed, 3/16" gate face, hollow core
- Draft Arm: Wide set steel tubular, structurally pinned to aluminum floor channels
- Drop Legs: Steel, mounted to the draft arms
- Subframe: 18" Deep extruded heavy aluminum beam, including internal structure
- Nose: 3/16" Alum 5454-H32, with heavy doghouse structure for joist support, capped with steel bolted plate
- Lights: Full DOT lights, lead sealed lights, harness and junction box with terminal strip

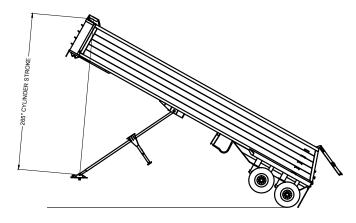

- Suspension: Bolt on Watson Chalin Integra TI300 (Light weight integreated) Air ride, 30,000 lb per axle, tandem axle
- Wheels: 10 Hole, Hub pilot, Steel or Aluminum (optional)
- Tires 11R x 24.5, 16ply
- Brakes: 16 1/2 X 7 with spring parking, auto slacks, Wabco 4S-2M ABS System
- Tire Carrier: One, mounted ahead of the suspension frame
- Mud Flaps: Anti-sail

OPTIONS:

- Tarps: Available per customer request
- · Aluminum wheels
- 3/8" HMW Floor Liner Only
- Spare tire rack
- 3rd Brake light



ALUMENDDUMP • 10/15