

RANCO Drill Cutting End Dump Trailer







SPECIFICATIONS:

Capacity: 20 cu. yd.

Overall Length: 26' 4"

• Body Length: 24'

• Bridge: 22' 7.5"

Cylinder Length: 200"

Dump Angle: 45°





Dual Hydraulic operated sliding doors with complete cover enclosure makes this the ideal drill cutting hauling trailer.










DRILLCUTENDDUMP •10/14

RANCO Drill Cutting End Dump Trailer

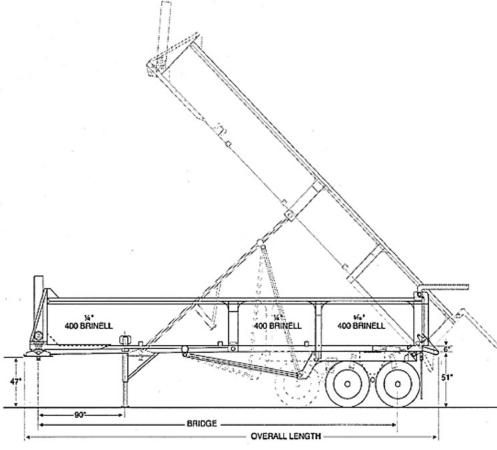




Radius Flanged Front Bulkhead: stronger built welds away from the corner reduces stress concentration in critical areas.

Vertical Front Bulkhead: 3' longer inner bridge with the same length body. 1/4" Gate & Nose.

- Dual operated sealed rolling lids
- Parking Legs: Adjustable Mounted on Draft Arms
- Draft Arms High Strength Fabricated 76" Wide at Hinge
- Bolt on Front & Rear Fenders
- Front Mounted Ladder
- Gate: Sealed Gate with twist locks & chain binders
- Hutchens H~903, 50,000 lb. Single Point Suspension
- 25,000 lb. 5" Tubular Axle with Stemco Seals
- 16.5" x 7" Air Brakes with Auto Slack Adjusters
- Mentor~Wabco A8S Brake System
- Outboard Hubs with Lightweight Steel Drums
- 8.25 x 24.5 Steel Disc Wheels
- 11R x 24.5 Tires 16 ply
- Circuit Breaker Protected Sealed Beam Lights
- Wiring in Loom and Enclosed in Trailer Frame
- Sealed Document Holder

OPTIONAL:

Paint color

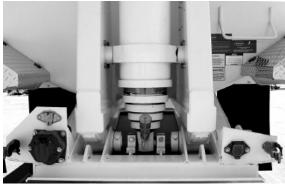

Inverted Trunnion Cylinder: reduces maintenance on cylinder wiper seals.

Bolt-in Trunnion Bearings: improve lateral stiffness for easier cylinder and bearing maintenance

Independent Rod End Bearing Shaft: shear point in turnover, easier cylinder maintenance.

