



DRAGON[®]

DP125 6x6 Pump



SPECIFICATIONS:

- 6NHTA Cornell Pump Package with 125HP John Deere Engine; Vac Assisted Pump

6NHTA Cornell Redi-Prime Pump

- All Iron Construction
- Horizontal Engine Mount
- SAE 3 Bell Housing
- 11.5" Drive Coupling
- Tungsten to Silicon Carbide Mechanical Seal.
- Run-Dry reservoir
- Redi-Prime Priming System
- Oil lubricated Bearings
- Enclosed Stainless Impeller w/ 3" solids handling capability

125HP Tier 3 John Deere Power Unit

- Model 4045
- In-Line 4 Cycle Turbo Charged
- Liquid Cooled
- 12 Volt
- Interim 125HP
- LOFA 750 Standard Instrumentation W/ 15amp float switch
- Two year / 2000 Hour Warranty

Fuel Cell Skid w/ Lifting Bell

- 6k Single Axle 16" 10ply trailer tires
- 96gal fuel cell
- Over the road light package
- Customer specified fittings
- Work Light and pressure gauges
- Dual 8K Leveling Jacks



600HPPUMP • 2/16


frac.sales@modernusa.com • www.dragonproductsltd.com • 866-914-8198

U.S. owned and operated for over 50 years. © Copyright 2014 Modern Group Inc. All rights reserved.

DP125 6x6 Pump

Performances shown are for S.G. 1.0
60°F water, close-coupled configuration.
Other mounting styles or S.G.
may require curve adjustments.

Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
VARIOUS	14.0"	ENCLOSED	SINGLE	3"	2120	6"	6"	2

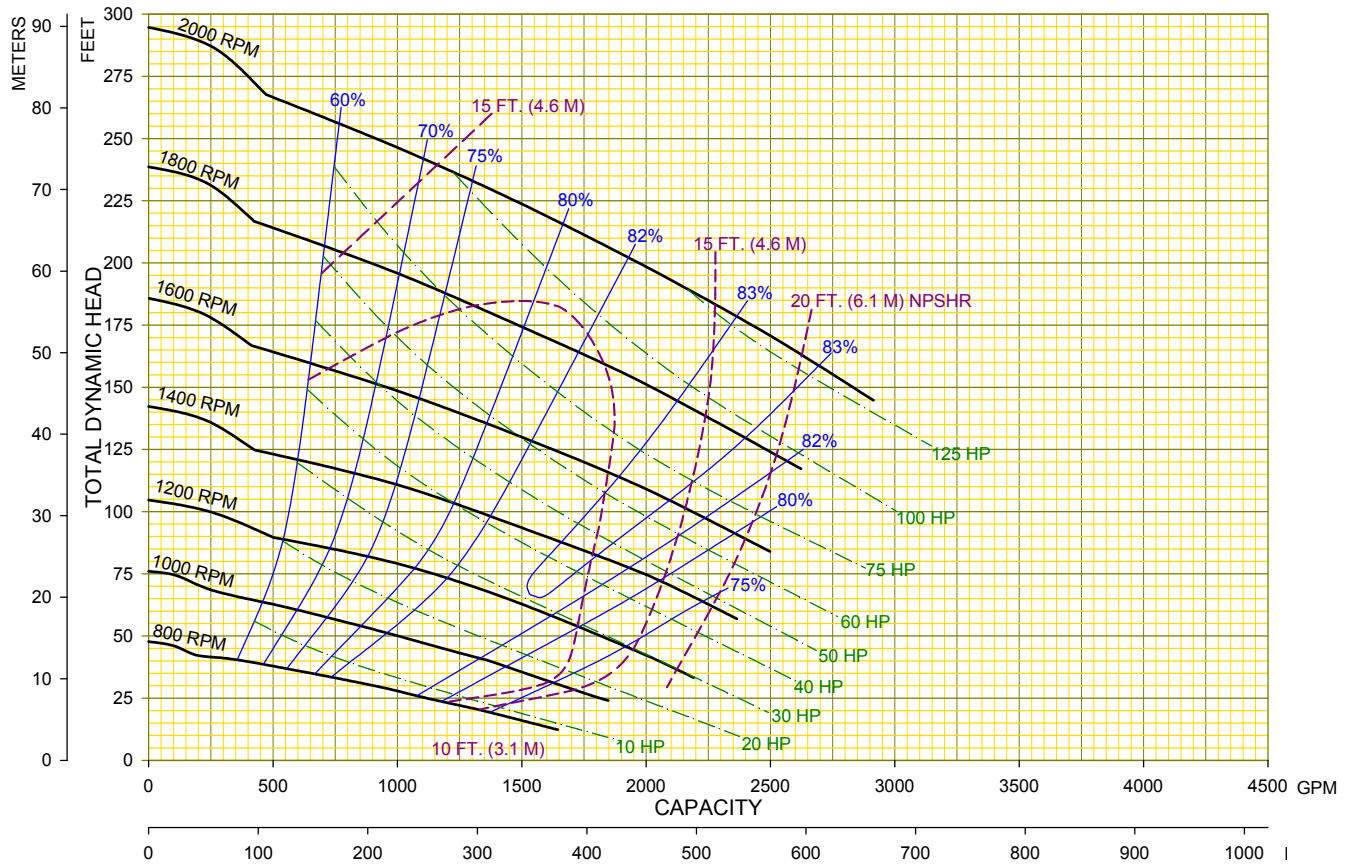

frac.sales@modernusa.com • www.dragonproductsltd.com • 866-914-8198
U.S. owned and operated for over 50 years. © Copyright 2014 Modern Group Inc. All rights reserved.